

Mini outriggers for kayak

2022 10 22


- Material: Stainless steel 316
- Nuts and bolts: 6 mm
- Floats: PVC tube 11 cm diameter
length 100 cm
3 D printed half sphere heads

4 parts :


- Mid frame in two parts (A or H shape)
- Floats with separate frame

Floats adjustable in height.

Adjustment: just above the water with full load (personal preference).

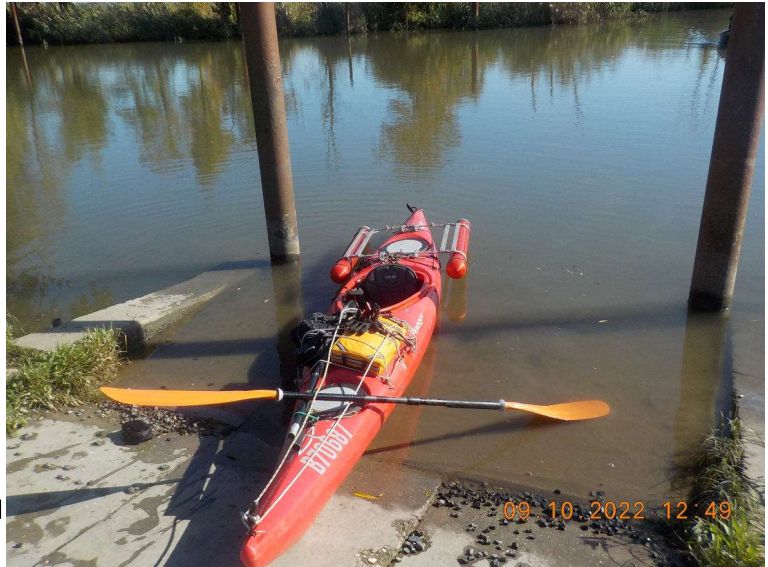

– Main frame in two parts for easy transport

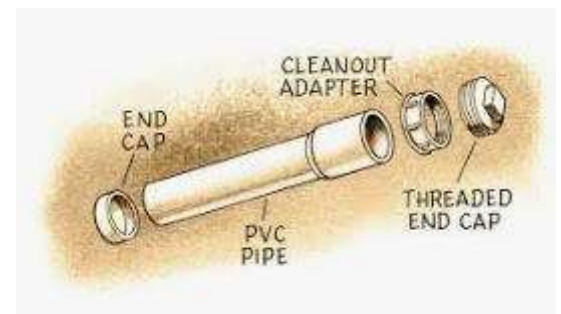

– Double fork system for connection of the parts of the main frame.





Front end: The small connection strip between float frame and main frame can be bended for height adjustment. Hight or angle adjustment pads can be added.



23.10.2022 08:38



Back end.

- with mounting equipment for a foldable ladder or stirrup (experimental).



Mounting system on the kayak.

Two strips (30 / 5 mm) , one inside and the same one outside, carefully bended to the hull shape, bolted with eye nuts on the outside.

One mounting system on each side of the hatch.






The main frame parts connected.

Mounted and locked with the carabiners.



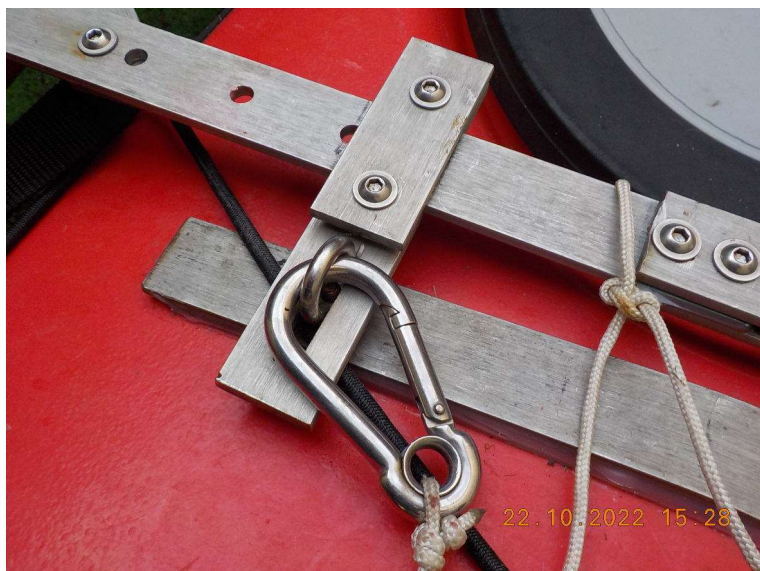

Front end.

Back end.



Paul Nollen

paul.nollen@skynet.be

<http://blog.seniorennet.be/kajak/>

Previous models (foldable) <http://blogimages.seniorennet.be/kajak/attach/112318.pdf>